
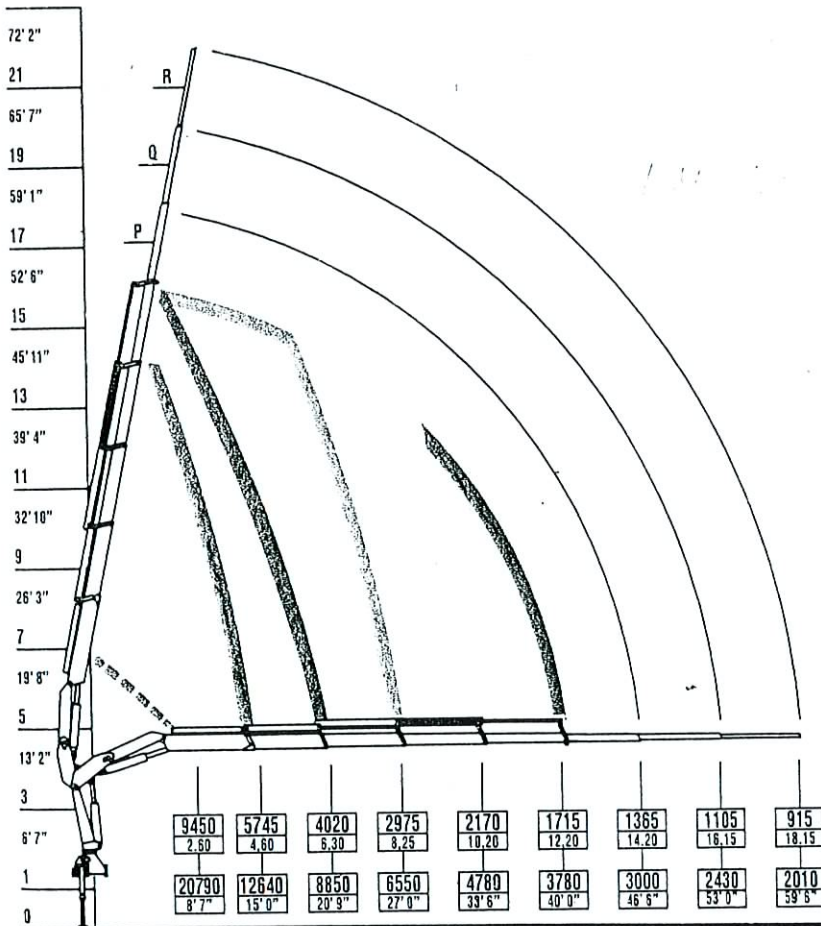


Standard		
A	1750	5'9"
B	1750	5'9"

Extra		
A	2300	7'7"
B	2300	7'7"

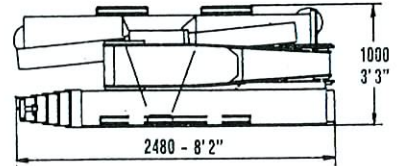

# F300.24

- HEAVY LIFT HOOK**  
EERSTE HAAK  
PRIMER GANCHO  
STOR KROK
- SWIVELING HOOK**  
BEWEGHAAK  
GANCHO MOBIL  
SVIVELKROK
- P** **TELESCOPIC MANUAL EXTENSIONS**  
MECHANISCHE VERLENGING  
PROLONGAS MANUALES
- Q** **TELESCOPIC MANUAL EXTENSIONS**  
MECHANISCHE VERLENGING  
PROLONGAS MANUALES
- R** **TELESCOPIC MANUAL EXTENSIONS**  
MECHANISCHE VERLENGING  
PROLONGAS MANUALES

9450	5745	4020	2975	2170	1715	1365	1105	915	Kg
2,60	4,60	6,30	8,25	10,20	12,20	14,20	16,15	18,15	m
20790	12640	8850	6550	4780	3780	3000	2430	2010	lbs
8'7"	15'0"	20'3"	27'0"	33'6"	40'0"	46'5"	53'0"	59'5"	ft

Lifting capacity Hefvermogen Capacidad de elevación Kapasitet	kNm 258 (26,3 tm)	lbs.ft 189355	Rotation Zwenkbereik Ángulo de rotación Svingsektor	400°	400°	Pump capacity Pomp-opbrengst Capacidad de la bomba Pumpekapsitet	l/min 45	gal/min 12
Standard reach Standaardarm Brazo standard Standard rekkevidde	m 12,41	ft 40'8"	Rotation torque Draaimoment Potencia de rotación Svingkraft	kNm 46,76 (4766 Kpm)	lbs.ft 34429	Oil tank capacity Capaciteit van de olietank Capacidad depósito aceite Oljetankkapasitet	l 180	gals 48
Hydraulic extension Hydraulische verlenging Estensión idraulica Hydraulisk rekkevidde	m 7,62	ft 25'	Working pressure Werkdruk Presión de trabajo Arbeidstrykk	MPa 27,5 (275 bar)	psi 4000	Crane weight Eigen gewicht Peso de la grúa Vekt	Kg 3670	lbs 8100